


- GENERAL NOTES**
- OUR SPECIFICATIONS DATED JANUARY 1983 APPLY TO THIS PROJECT.
 - THE WORKING WIDTH AVAILABLE TO THE CONTRACTOR TO CONSTRUCT THE NEW DRAIN SHALL CONSIST OF THOSE LANDS IMMEDIATELY ADJACENT TO THE DRAIN AND SHALL NOT EXCEED AN AVERAGE WIDTH OF 18 METERS ON ONE SIDE OF THE DITCH INCLUDING THE BUFFER STRIP. THE WORKING WIDTH SHALL REMAIN 18 METERS FOR PURPOSES OF FUTURE MAINTENANCE.
 - ALL OWNERS ALONG THE COURSE OF THE DRAIN SHALL MAKE AN ACCESS ROUTE FROM THE NEAREST ROAD TO THE DRAIN LOCATION AVAILABLE TO THE CONTRACTOR THE AVERAGE WIDTH OF THIS ROUTE SHALL NOT EXCEED 8 METERS. THE ACCESS ROUTE SHALL ALSO APPLY FOR FUTURE MAINTENANCE PURPOSES.
 - CONTRACTOR TO VERIFY EXACT LOCATION AND ELEVATION OF ALL UTILITIES PRIOR TO CONSTRUCTION.
 - ALL TREES, SCRUB, BRUSH, ETC. TO BE CLEARED AND GRUBBED IN ACCORDANCE WITH SPECIFICATIONS.
 - QUARRY STONE SHALL RANGE IN SIZE FROM 150mm TO 400mm EVENLY DISTRIBUTED AND SHALL BE PLACED TO A 400mm THICKNESS ON A SUITABLE FILTER BLANKET AT A 1:5:1 SLOPE UNLESS OTHERWISE NOTED. FILTER BLANKET TO BE "HIRAFI 140 NO. 4" OR APPROVED EQUAL.
 - CONTRACTOR TO ARRANGE A PRE-CONSTRUCTION MEETING WITH THE ENGINEER, DRAINAGE SUPERINTENDENT, AND THE AFFECTED OWNERS. ALL PARTIES SHALL RECEIVE 48 HOURS NOTICE TO THE MEETING.
 - EXCAVATED MATERIAL TO BE DEPOSITED AND LEVELLED ON NORTH AND EAST SIDES OF DITCH, BEYOND THE DESIGNATED BUFFER STRIP.
 - A 3 METER WIDE BUFFER STRIP BETWEEN THE TOP OF THE BANK AND CULTIVATED LANDS ON BOTH SIDES OF THE DITCH IS TO BE CREATED AND MAINTAINED WITH THE FOLLOWING GRASS SEED MIXTURE:
 - BUFFER STRIPS AND NEWLY RECONSTRUCTED DITCH BANKS ARE TO BE HYDRO SEEDING AND MULCHED UPON COMPLETION OF CONSTRUCTION IN ACCORDANCE WITH O.P.S. 152 AND WITH THE FOLLOWING APPLICATION RATES:
SEED MIXTURE: 10% WHITE CLOVER, 10% CHEWINGS FESCUE, 15% FIESTA PERENNIAL RYEGRASS, 15% TROTNY, 15% CHEWINGS RED FESCUE, 25% TALL FESCUE, 10% DORME KENTUCKY BLUEGRASS.
 - FERTILIZER: (300 Kg./Ha.) 8-32-16 HYDRAULIC MULCH: (2,000 Kg./Ha.) TYPE "B" WATER: (52,100 Litres/Ha.)
CONTRACTOR SHALL BE RESPONSIBLE FOR ADDITIONAL SEEDING IF REQUIRED TO PROVIDE A SUFFICIENT AND UNIFORM CATCH. HYDRO SEEDING IS NOT RECOMMENDED BETWEEN JUNE 14 JUNE 14 AND AUGUST 14, OR AFTER SEPTEMBER 30.
 - STRAW BALES OR SILT FENCE TO BE PLACED ACROSS DITCH BOTTOM AT STA. 1+135 + 0+130 DURING CONSTRUCTION TO PREVENT SILT FROM FLUSHING DOWNSTREAM. STRAW BALES, SILT FENCE AND SILT TO BE REMOVED AND DISPOSED OF AFTER CONSTRUCTION.

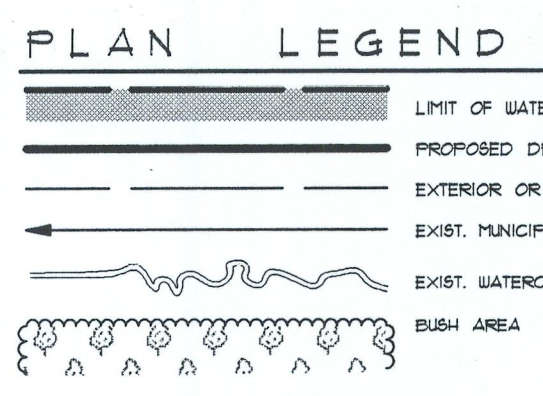

PLAN SCALE 1:7,500

Drainage Superintendent: MATTHEW STEPHENSON 264-1001

PARKER DRAIN 1998
TOWNSHIP OF CARADOC

Drawn By: M.P.D. Field Book: JOB No. 98005 Drawing No. 1 of 1
Date: NOV. 30, 1998 D-103

SPRIET ASSOCIATES LIMITED CONSULTING ENGINEERS
155 YORK STREET - LONDON (919) 672-4100 - N6A 1A8